


1/8" NPT Stainless Steel 2-Way Direct Acting Normally Open

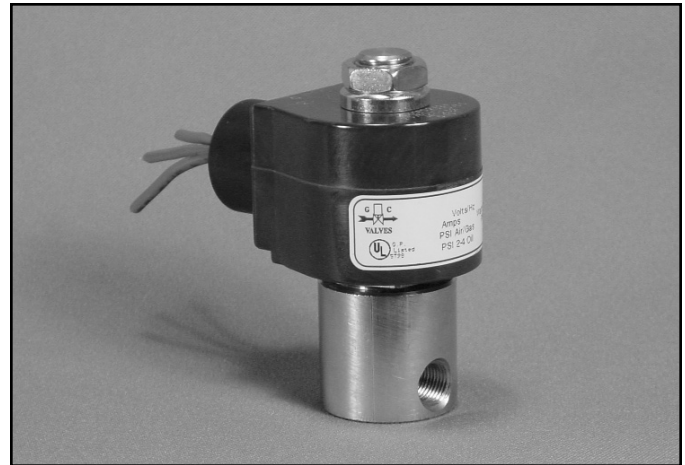




Materials	Seals:	Nitrile, Viton®, Ethylene Propylene, Teflon®, Rulon
	Orifice:	Stainless Steel
Electrical	Standard Housing:	Encapsulated Waterproof Conduit (NEMA 4/4X)
	Optional Housings:	Metallic Conduit, Explosion-proof (NEMA 7), Grommet, Open Frame, Junction Box (single or dual knockouts), DIN; Contact GC Valves Customer Service for others.
	Standard Voltages:	24, 120, 240 AC 60 Hz; 50 Hz available 6, 12, 24 DC; Contact GC Valves Customer Service for Additional Voltages.
	Voltage Tolerance:	±10% of applicable voltage
	Coil Classes:	F, H, N
	Standard Lead Length:	24 inch
Operating Temperature	Ambient (Nominal):	32°F to 125°F
Mounting	Position:	Any
Approvals*	Agency:	UL Listed, UL Recognized, CSA Approved

* Not available for all variations

© Registered Trademark of DuPont Co.

Dimensions/Weight

Weight (lbs.)
0.9

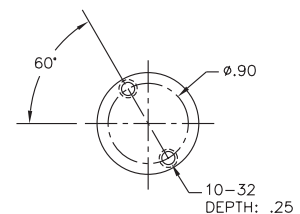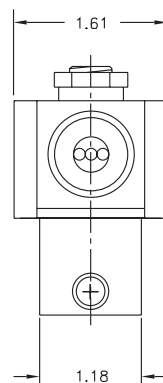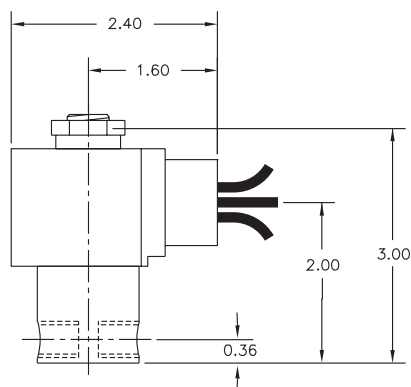


GC Valves Customer Service: 800-828-0484 (7:30am to 4pm ET) or 800-582-4232 (7:30am to 4pm PT)




S312 – 1/8" NPT, Stainless Steel Body, Normally Open

Valve Selection List


Normally Open

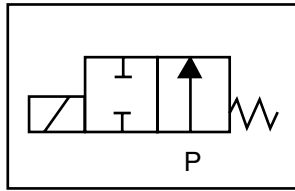

Energized

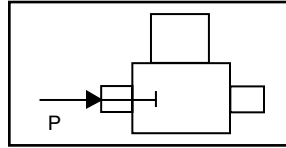

De-Energized

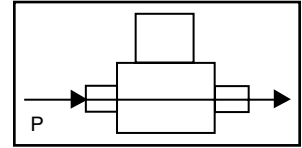

Pipe Size NPT	Orifice Size in.	C _v	Operating Pressure Differential (psi)								Max Fluid Temp. °F	Seal Material	Power Consumption (Watts)		Model Code (120V/60HZ — 110V/50HZ) Shown	
			Maximum										AC	DC		
			Air/Gas		Water		Light Oil		Steam*							
			AC	DC	AC	DC	AC	DC	AC	DC			AC	DC	Stainless Steel Body	
1/8	1/32	.03	0	2000	2000	2000	2000	—	—	150*	150*	295	EPR	8	9	S312GF02C2AC1
	3/64	.05	0	350	350	350	350	—	—	150*	150*	295	EPR	8	9	S312GF02C2AC3
	1/16	.10	0	200	200	200	200	—	—	150*	150*	295	EPR	8	9	S312GF02C2AC5
	5/64	.15	0	140	140	140	140	—	—	140*	140*	295	EPR	8	9	S312GF02C2AC7
	3/32	.22	0	105	105	105	105	—	—	105*	105*	295	EPR	8	9	S312GF02C2AC9
	7/64	.25	0	80	80	80	80	—	—	80*	80*	295	EPR	8	9	S312GF02C2AD3
	1/8	.30	0	60	60	60	60	—	—	60*	60*	295	EPR	8	9	S312GF02C2AD5
3/16	.65	0	30	30	30	30	—	—	30*	30*	295	EPR	8	9	S312GF02C2AE1	
1/8	1/32	.03	0	2000	2000	2000	2000	—	—	—	—	180	Nitrile	8	9	S312GF02N2AC1
	3/64	.05	0	350	350	350	350	350	—	—	—	180	Nitrile	8	9	S312GF02N2AC3
	1/16	.10	0	200	200	200	200	200	—	—	—	180	Nitrile	8	9	S312GF02N2AC5
	5/64	.15	0	140	140	140	140	140	—	—	—	180	Nitrile	8	9	S312GF02N2AC7
	3/32	.22	0	105	105	105	105	105	—	—	—	180	Nitrile	8	9	S312GF02N2AC9
	7/64	.25	0	80	80	80	80	80	—	—	—	180	Nitrile	8	9	S312GF02N2AD3
	1/8	.30	0	60	60	60	60	60	—	—	—	180	Nitrile	8	9	S312GF02N2AD5
3/16	.65	0	30	30	30	30	30	—	—	—	180	Nitrile	8	9	S312GF02N2AE1	
1/8	1/32	.03	0	2000	2000	2000	2000	2000	2000	—	—	230	Viton	8	9	S312GF02V2AC1
	3/64	.05	0	350	350	350	350	350	350	—	—	230	Viton	8	9	S312GF02V2AC3
	1/16	.10	0	200	200	200	200	200	200	—	—	230	Viton	8	9	S312GF02V2AC5
	5/64	.15	0	140	140	140	140	140	140	—	—	230	Viton	8	9	S312GF02V2AC7
	3/32	.22	0	105	105	105	105	105	105	—	—	230	Viton	8	9	S312GF02V2AC9
	7/64	.25	0	80	80	80	80	80	80	—	—	230	Viton	8	9	S312GF02V2AD3
	1/8	.30	0	60	60	60	60	60	60	—	—	230	Viton	8	9	S312GF02V2AD5
3/16	.65	0	30	30	30	30	30	30	—	—	230	Viton	8	9	S312GF02V2AE1	
1/8	1/32	.03	0	2000	2000	2000	2000	2000	2000	150*	150*	366	Rulon	8	9	S312GF02R2AC1
	3/64	.05	0	350	350	350	350	350	350	150*	150*	366	Rulon	8	9	S312GF02R2AC3
	1/16	.10	0	200	200	200	200	200	200	150*	150*	366	Rulon	8	9	S312GF02R2AC5
	5/64	.15	0	140	140	140	140	140	140	150*	150*	366	Rulon	8	9	S312GF02R2AC7
	3/32	.22	0	105	105	105	105	105	105	150*	150*	366	Rulon	8	9	S312GF02R2AC9
	7/64	.25	0	40	40	40	40	40	40	40*	40*	366	Rulon	8	9	S312GF02R2AD3
	1/8	.30	0	60	60	60	60	60	60	60*	60*	366	Rulon	8	9	S312GF02R2AD5
3/16	.65	0	30	30	30	30	30	30	30*	30*	366	Rulon	8	9	S312GF02R2AE1	
1/8	1/32	.03	0	2000	2000	2000	2000	2000	2000	150*	150*	366	Teflon	8	9	S312GF02T2AC1
	3/64	.05	0	600	600	600	600	600	600	150*	150*	366	Teflon	8	9	S312GF02T2AC3
	1/16	.10	0	200	200	200	200	200	200	150*	150*	366	Teflon	8	9	S312GF02T2AC5
	5/64	.15	0	140	140	140	140	140	140	140*	140*	366	Teflon	8	9	S312GF02T2AC7
	3/32	.22	0	105	105	105	105	105	105	150*	150*	366	Teflon	8	9	S312GF02T2AC9
	7/64	.25	0	80	80	80	80	80	80	80*	80	366	Teflon	8	9	S312GF02T2AD3
	1/8	.30	0	60	60	60	60	60	60	60*	60*	366	Teflon	8	9	S312GF02T2AD5
3/16	.65	0	30	30	30	30	30	30	30*	30*	366	Teflon	8	9	S312GF02T2AE1	

* Class H Coil Recommended for Steam and Other High Temperature Applications

GC Valves Customer Service: 800-828-0484 (7:30am to 4pm ET) or 800-582-4232 (7:30am to 4pm PT)

S312 – 1/8" NPT, Stainless Steel Body, Normally Open



Part Numbering

1	2	3	4	5	6	7	8	9	10	11	12	13
S	3	1	2	G	F	0	2	V	2	A	C	1
Series			Operating Mode	Housing*	Coil Class*	Voltage*		Seal Material	Body Material	Pipe Connection	Orifice Size	
S31			2: Normally Open	G: Conduit	F: Class F H: Class H	02: 120/60 110/50		C: EPR N: Nitrile V: Viton R: Rulon T: Teflon	2: Stainless Steel	A: 1/8" NPT	C1: 1/32" C3: 3/64" C5: 1/16" C9: 3/32" D5: 1/8" E1: 3/16"	
* See the "Engineering Guide" for additional voltages, variations and options.												

Coil Data

Coil Family	
Type	Size
All	S3

Frequency (Hz)	60	50
Nominal Power (VA)	Inrush	36
	Holding	18



S312 – 1/8" NPT, Stainless Steel Body, Normally Open

This Page Intentionally Blank

GC Valves Customer Service: 800-828-0484 (7:30am to 4pm ET) or 800-582-4232 (7:30am to 4pm PT)